



HENRAD TOWEL WARMERS



HYDROHEAT
SUPPLIES PTY LTD

Oceanus
Towel Warmers

GENERAL INFORMATION


- **Size:** Available in 3 heights with 3 different widths
Vertical tubes, 30 x 40mm; Thickness 1.5mm
Horizontal tubes 25mmØ; Thickness 1.2mm
- **Finish:** Degreased at high temperature, a unique undercoat and electro coated paint dip applied. Final coat is a hard wearing epoxy powder coat baked at 200°C
- **Colour:** RAL 9016 White
- **Test Pressure:** 13 bar, 1300kPa
- **Max Operating Pressure:** 10 bar, 1000kPa
- **Max Working Temperature:** 95°C
- **Connections:** 3 x 1/2" F.I. BSP
- **Accessories:** 3 x wall mounting brackets, 1 x air vent
- **Optional electric elements available for towel warming in summer**

Warranty

5 year Manufacturers Warranty is granted on Henrad Towel Warmers (subject to correct installation and adequate ventilation). Replacement only, this does not cover site labour fees.



TECHNICAL DRAWING

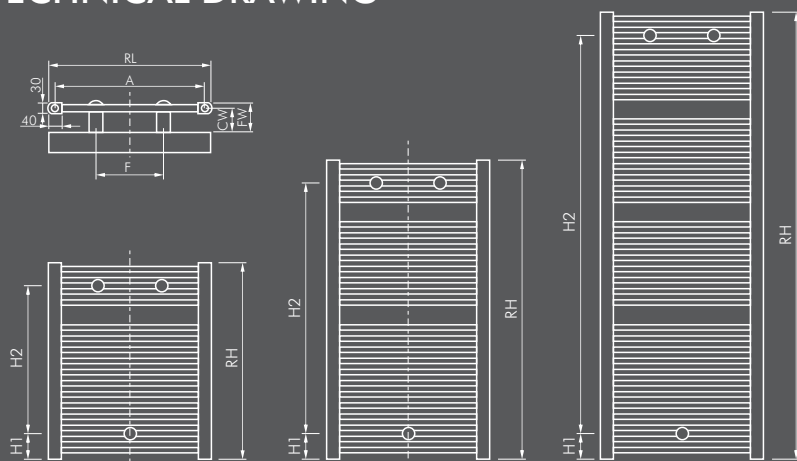

RH	H1	H2
775	102	582
1181	102	988
1763	102	1570

RL	A	F	CW	FW
495	455	320	65-85	80-100
585	545	410	65-85	80-100
737	697	560	65-85	80-100

Measurements shown in millimetres

TECHNICAL DATA

Height (mm)	Width (mm)	495	585	737
775	Output (Watt)	460	532	653
	Weight (kg)	6.00	6.89	8.40
	Water content (L)	3.60	4.01	4.70
1181	Output (Watt)	679	787	964
	Weight (kg)	9.00	10.23	12.3
	Water content (L)	5.40	6.03	7.10
1763	Output (Watt)	997	1154	1413
	Weight (kg)	13.40	15.26	18.40
	Water content (L)	7.99	8.94	10.55

All HENRAD outputs are based on EN 442 Delta T, 60 deg. C.

Due to our constant endeavour for improvement, we reserve the right to change product specifications without notice.

Made in Belgium by Henrad



HYDROHEAT
SUPPLIES PTY LTD

SHOWROOM
6 Helen Kob Drive
Braeside Victoria 3195
Ph: (+613) 9588 1299
Fax: (+613) 9588 2199
www.hydroheat.com.au



Distributed by: